

# Three-way valve

**Publication number:** EP0848194 (A2)

**Publication date:** 1998-06-17

**Inventor(s):** WEISSENBACHER ANDREAS [AT]; OBERHAUSER ERNST [AT]; MAIRHOFER ANTON [AT] +

**Applicant(s):** WEISSENBACHER ANDREAS [AT]; OBERHAUSER ERNST [AT] +

**Classification:**

- international: **F16K11/044; F16K31/122;** (IPC1-7): F16K11/044; F16K31/122

- European: F16K11/044; F16K31/122F

**Application number:** EP19970890207 199710 16

**Priority number(s):** AT1996000216 9 19961212

**Also published as:**

EP0848194 (A3)  
AT407291 (B)

**Cited documents:**

DE2715936 (A1)  
US5069246 (A)  
US3617151 (A)  
US5435336 (A)  
US2386291 (A)

## Abstract of EP 0848194 (A2)

The main hollow valve body (8) is adjustable in relation to two valve seatings along a guide rail (6) especially in the form of a cylindrical bar. The interior of the hollow body is divided by a fixed partition (7) into two areas (80a,80b) into which lead pipes (62,63) containing a pressurised medium. The inflow of pressurised medium into one of the two parts causes the hollow body to be displaced along the guide rail. The hollow body is in the form of a hollow cylinder closed at both axial ends by cover-walls (81,82).

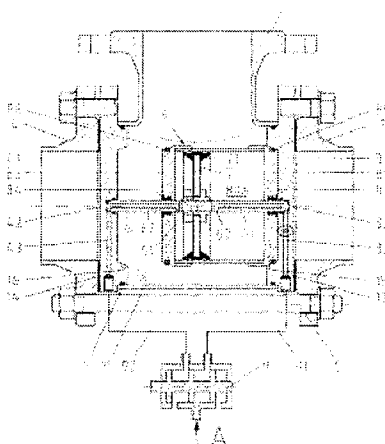


Fig. 1

Data supplied from the **espacenet** database — Worldwide